# Multilumen Lichtleiste TRAQ

Anwendungshinweis - Note d'application - Nota di applicazione - Application note

## TRAQ INS m... LED...ONF ML




Sono permesse solo le impostazioni elencate
Only the listed settings are permitted

| Luminaire (m) | Luminous flux (lm) | System Power (W) | Iout (mA) | 1 | 2 | 3 | 4 |
|---|---|---|---|---|---|---|---|
| 1.2 | 2250 | 14 | 100 | – | – | – | – |
| 1.2 | 3350 | 21 | 150 | – | – | ON | ON |
| 1.2 | 4450 | 28 | 200 | – | ON | ON | – |
| 1.2 | 5600 | 35 | 250 | ON | – | – | ON |
| 1.2 | 6700 | 41 | 300 | ON | ON | – | – |
| 1.2 | 7800 | 48 | 350 | ON | ON | ON | ON |
| Luminaire (m) | Luminous flux (lm) | System Power (W) | Iout (mA) | 1 | 2 | 3 | 4 |
| 1.5 | 5600 | 34 | 200 | – | – | – | – |
| 1.5 | 7000 | 42 | 250 | – | ON | – | ON |
| 1.5 | 8300 | 51 | 300 | ON | – | ON | – |
| 1.5 | 9700 | 59 | 350 | ON | ON | ON | ON |

## TRAQ CASE INS m... LED...ONF ML




Case Multilumen Iout= max. 267mA

Nur die aufgeführten Einstellungen sind zulässig
Seuls les paramètres énumérés sont autorisés

| Luminaire (m) | Luminous flux (lm) | System Power (W) | Iout (mA) | 1 | 2 | 3 | 4 |
|---|---|---|---|---|---|---|---|
| 1.2 | 1860 | 14 | 100 | – | – | – | – |
| 1.2 | 2800 | 21 | 150 | – | – | ON | ON |
| 1.2 | 3400 | 26 | 184 | – | ON | – | ON |
| 1.2 | 4350 | 33 | 234 | ON | – | – | – |
| 1.2 | 4950 | 38 | 267 | ON | – | ON | – |
| Luminaire (m) | Luminous flux (lm) | System Power (W) | Iout (mA) | 1 | 2 | 3 | 4 |
| 1.5 | 2350 | 17 | 100 | – | – | – | – |
| 1.5 | 3500 | 26 | 150 | – | – | ON | ON |
| 1.5 | 4250 | 32 | 184 | – | ON | – | ON |
| 1.5 | 5500 | 41 | 234 | ON | – | – | – |
| 1.5 | 6200 | 46 | 267 | ON | – | ON | – |

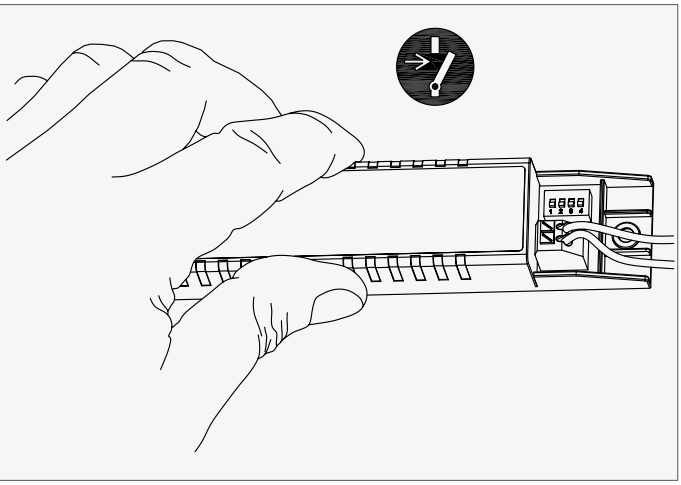

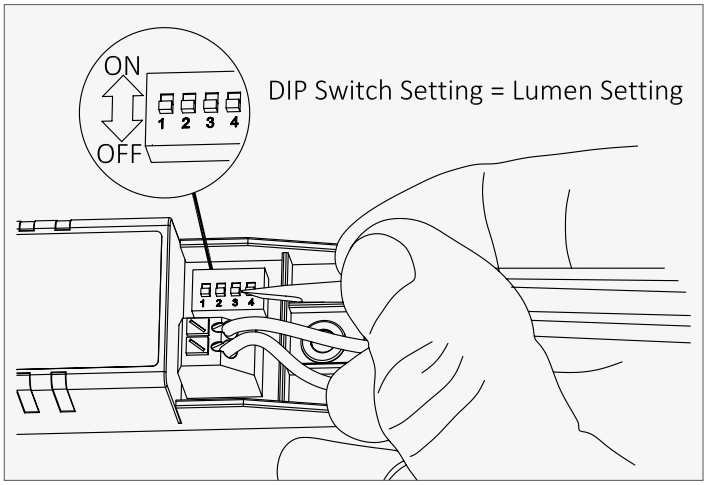


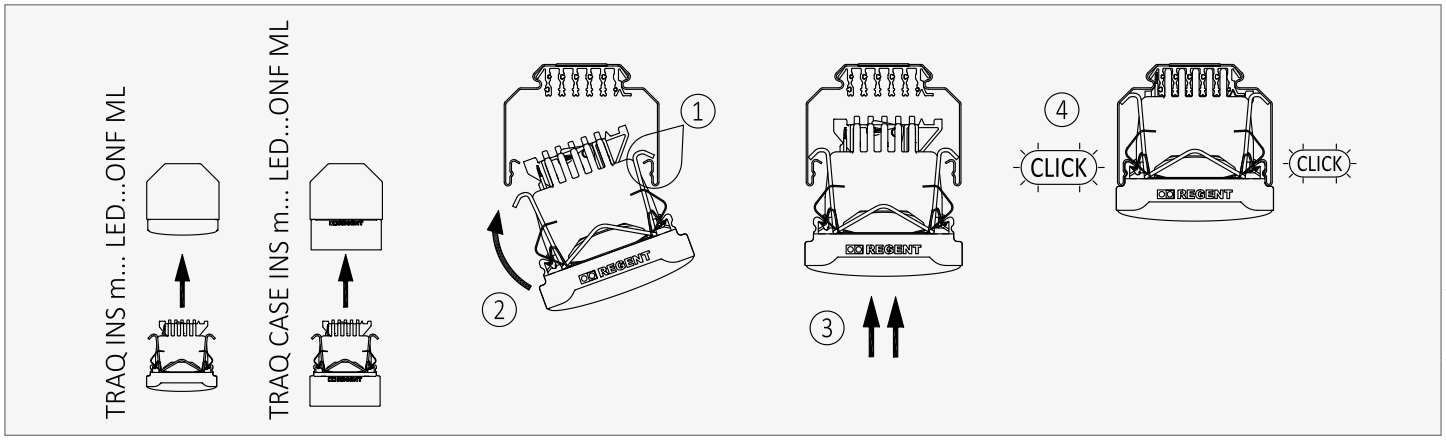


2006.0834 / 51.021.29 / 01.2021